

RY-GDL

METAL OXIDE THIN FILM RESISTOR - TYPE HIGH FREQUENCY

FEATURES

- Film material: Metal Oxide Film
- Film: all covered
- Core: ceramic rod
- Resistance value range: 10 Ω - 5K Ω
- Resistance Tolerance: $\pm 1\%$ - $\pm 10\%$
- Resistance Temperature Coefficient: ± 50 ppm - ± 400 ppm
- Speciality: good overload, low inductive and high frequency performance; can be widely used in high frequency circuit
- Oil cooled (silicone xiameter mpx-561)



TYPICAL APPLICATIONS

- Broadcasting
- DC accelerator
- Pulse Gounding Testing
- Medical equipment
- X-ray detection apparatus
- Pulse Waveform
- High voltage power supply of LINAC

THECNOLOGY STANDARD



- FL5905GJB3017-97
- QJB/QH1619-2007

NR *new resistance*
precision without limits

RY-GDL

METAL OXIDE THIN FILM RESISTOR - TYPE HIGH FREQUENCY

POWER DERATING CURVE

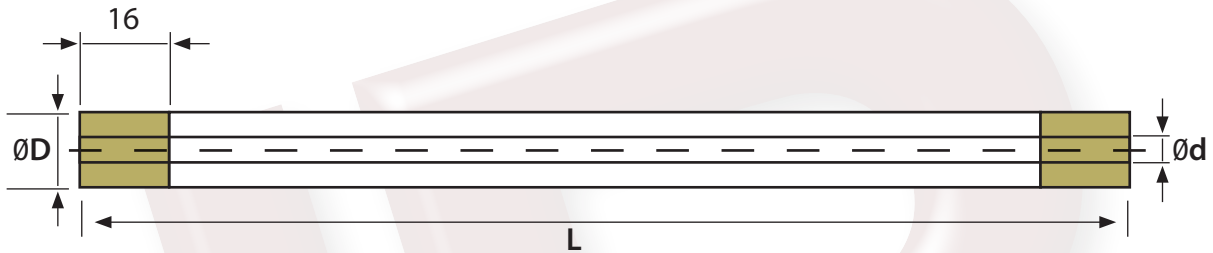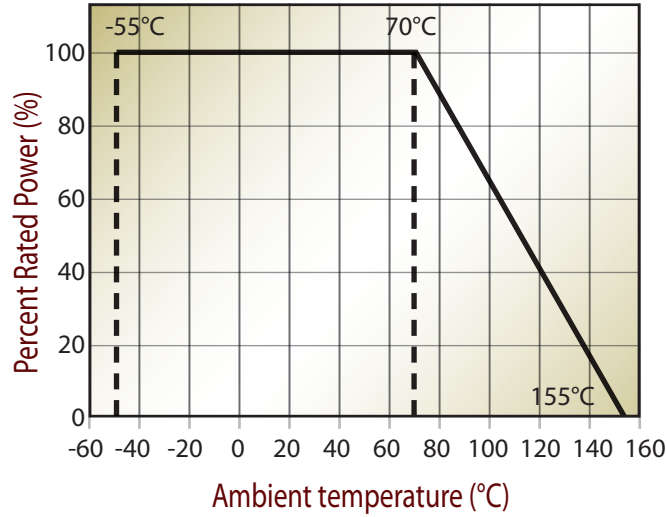

TECHNICAL SPECIFICATION

Model	Rated Power (W)	Resistance Value (Ω)	Resistance Tolerance (%)	Limiting Voltage (KV)	Temperature Coefficient $\times 10/K$ (PPM)	Contour Dimension ($\varnothing D \times L \times \varnothing d$) (mm)
RY-GDL10	2.5KW RMS	50	$\pm 2\%$	50	100PPM	22.5*300*14.5
RY-GDL20	10KW RMS	50	$\pm 2\%$	80	100PPM	28.6*443*21.8

NR *new resistance*
precision without limits